

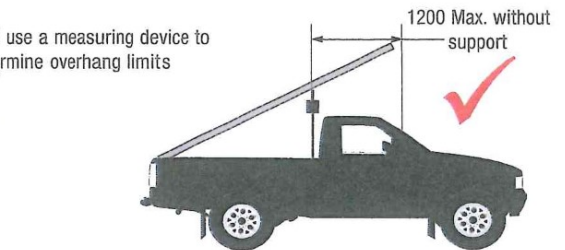


LOADING REQUIREMENTS




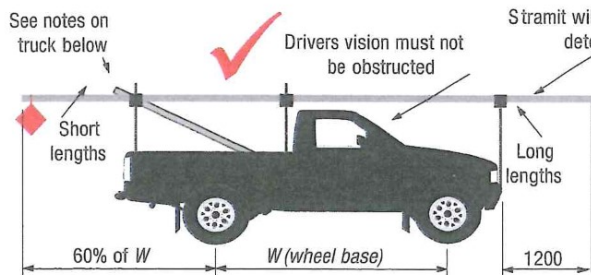


OVERHANG LIMITS

THE DRIVER'S VISION MUST NOT BE OBSTRUCTED

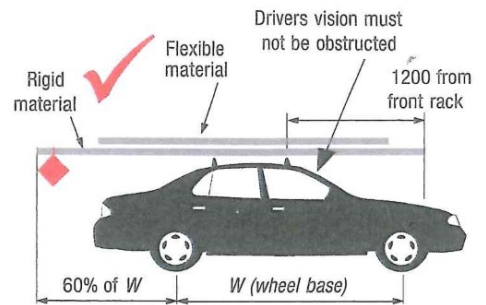

Utes with tapered loads are **NOT ACCEPTABLE**

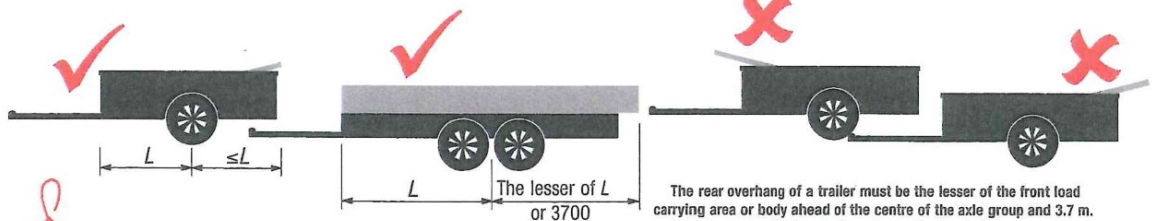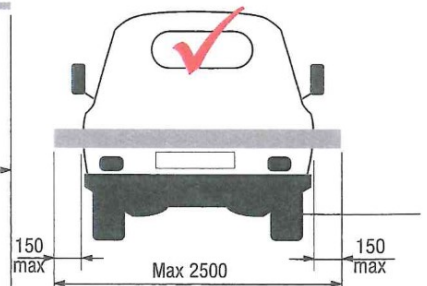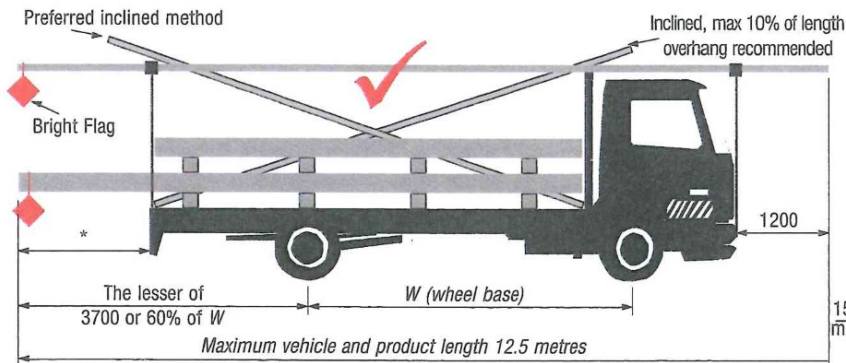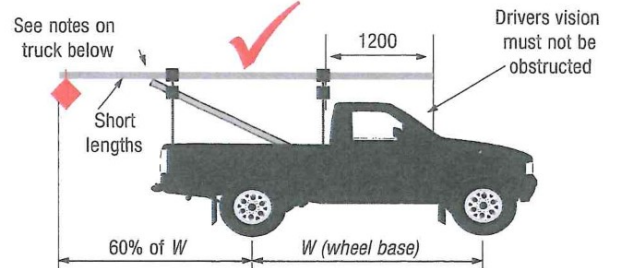

A 450MM SQUARE BRIGHT RED FLAG

IS REQUIRED ON ANY OVERHANG THAT CANNOT BE EASILY SEEN (MANDATORY BEYOND 1200mm)